

EVOLite®

MIDPEAK - SLIP RATCHET - VENTILATED

THE LIGHTEST SAFETY HELMET AVAILABLE IN EUROPE

TECHNICAL SPECIFICATION

HEAD PROTECTION

INSTRUCTIONS FOR USE

Fit helmet on head and fasten strap to ensure fit

For adequate protection this helmet must be worn with peak facing forward

Ensure the helmet is adjusted to the size of the user's head



SHELL:
High strength engineering grade ABS

WEBBING HARNESS:

HDPE Strap & Webbing Clips with Polyester Webbing Straps

CHAMLON™ SWEATBAND:

Egyptian cotton core with porous PU coating for maximum sweat absorption. PH neutral, dermatologically tested



SLIP RATCHET:

One Touch™ Slip Ratchet version of the EVOLite™ is so simple to fit that it can be adjusted with just one finger

OneTouch
PATENTED ADJUSTMENT

CLICK HERE

To learn more about the unique EVOLite® 3D Adjustment System



CLEANING & MAINTENANCE

The unit may be cleaned with soap and warm water and dried with a soft cloth

The helmet should not be cleaned with chemical or abrasive cleaners

The helmet should be stored out of direct sunlight

The helmet should be stored away from chemicals and extremes of temperature

CONFORMITY

EN 397 for Industrial Safety Helmets

EN 50365 for Helmets for use in low voltage installations

EC Certificate Number 0279, issued by BSi Product Certification

Meets optional Lateral Deformation performance

Meets optional Molten Metal Splash performance

Wide size range. Slip or wheel ratchet - High comfort fit

Available vented or unvented. Available with mid or micro peak

Company personalisation available by printing



MANUFACTURING FOR SAFETY
WWW.JSP.CO.UK

UKSALES@JSP.CO.UK
TEL: +44 (0)1993 826050



EVOLite®

MIDPEAK - SLIP RATCHET - VENTILATED

THE LIGHTEST SAFETY HELMET AVAILABLE IN EUROPE

TECHNICAL SPECIFICATION


HEAD PROTECTION



DIMENSIONS OF OUTER PACKAGING

Quantity: 10

Weight: 3.2kg (Approx)

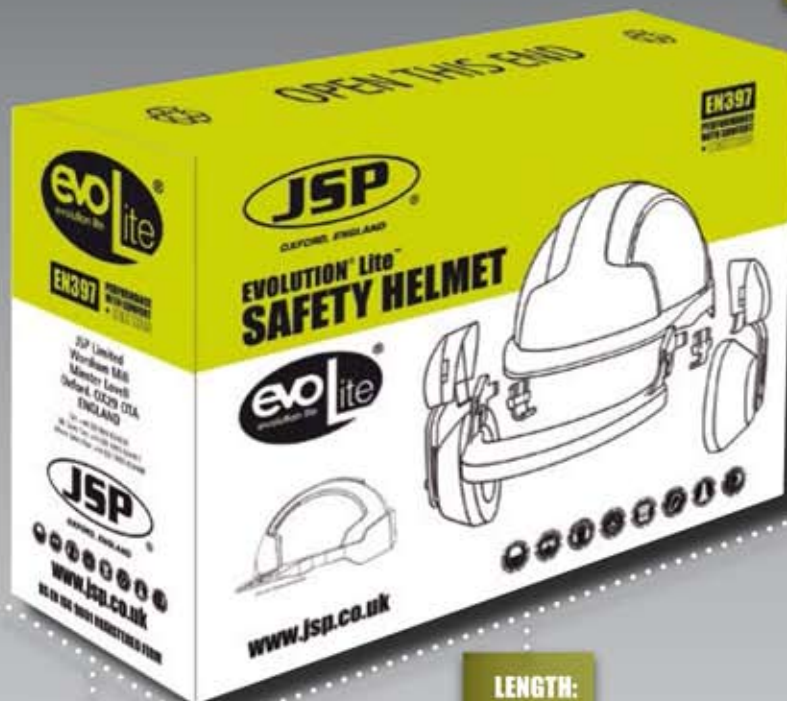

HEIGHT:
450mm

LENGTH:
580mm

WIDTH:
240mm

HELMET FEATURES

EN STANDARD	EN397 EN50365	Yes Yes
PERFORMANCE	Impact Resistance Lateral Deformation Electrical Insulation	Yes 50 Joules Yes EN50365 1000V
TEMPERATURE RESISTANCE	Molten Metal (MM) +50°C -30°C	Yes Yes Yes
SHELL MATERIAL	ABS Recyclable	Yes Yes
HARNESS MATERIAL	HDPE Textile	Yes Yes
OPTIONS	Universal Accesories Reflective CR2 option Integrated Eyewear	Yes Yes Yes
HARNESS SYSTEM OPTIONS	JSP 3D Slip Ratchet 6 pts	Yes Yes Yes
CHINSTRAP OPTIONS	4 pts 2 pts	Yes Yes
LOGO OPTIONS	Front Rear Side MOQ Logo Individual Name	Yes Yes Yes 10 Yes

DIMENSIONS OF HELMET

Size: 530 - 640mm

Weight: 299g (Approx)

HELMET COLOURS



01 White 02 Yellow 03 Green 05 Blue 06 Red 08 Orange

LIMITATIONS OF USE

Protection will only be offered if the helmet is fitted correctly

Any helmet subjected to severe impact should be replaced immediately. Do not apply paint, solvents or adhesive labels except in accordance with instructions from the manufacturer

The harness, when in contact with the skin may cause allergic reactions to susceptible individuals. If this occurs leave the hazard area, remove the helmet and seek medical advice

The attention of users is also drawn to the dangers of modifying or removing any of the original component parts, other than as recommended by the manufacturer



MANUFACTURING FOR SAFETY
WWW.JSP.CO.UK

UKSALES@JSP.CO.UK
TEL: +44 (0)1993 826050

